




## Time Recorder BÜRK ZWS Pro 40.10

The new BÜRK ZWS Pro 40.10 with 7" TFT touchscreen is a powerful multi-terminal for automated personnel time tracking. Employee identification is done contactlessly using RFID transponders or chip cards. The anti-reflective color display with its wide viewing angle is very easy to read day and night. Extra-large icons for easy operation are shown on the user-friendly display. These are operated via the touch-

screen. Additional information, such as account balance, remaining vacation etc. can be displayed depending on the configuration. Thanks to the uncomplicated wall mounting, quick commissioning is guaranteed. The power supply is via PoE or 12 volt power supply. This robust device is designed for environments from -10°C to + 40°C.

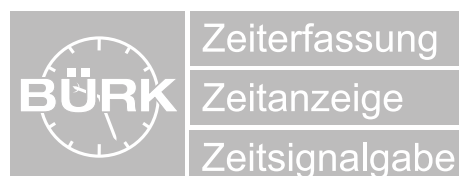

# Time Recording (Cloud Systems)

Technical specifications		ZWS Web
Casing		Plastic housing
Display	Typ	7" TFT, 800 x 480
	Brightness	450 cd / m <sup>2</sup>
Power consumption		8 W
Communication interfaces	RFID	HITAG 2, 125 kHz
		MIFARE 1K, 13,561MHz
		other reading methods like Desfire, EM4100, Legic o.a. on demand
	Ethernet	RJ45 10BaseT/100BaseTX (IEEE802.3) Auto-Negotiation
	RS 232	RJ12 modular connector, Selection from RS 232 + RS 485 or Wiegand after setting the internal switch*
	RS 485	
	Wiegand	
USB	USB-A High Speed	
WiFi	Compliant with 802.11 n/g/b Standards, Operation in the 2.4 GHz frequency range	
Communication protokoll		HTTP, SSL, NTP, SSH, TELNET, FTP, DHCP, HTTP PROXY, SOCK 5 PROXY, ARP, IP,TCP, UDP
Supply	Standard	over PoE (IEEE 802.3 af-Class 2) or 12 VDC
Certification	EMC	EN60950, EN55032, EN55024, EN300330-1, EN300330-2, EN301489-1, EN301489-3
Environmental conditions		-20 bis +40 °C, relative humidity, 10 bis 90 % not condensing
Protection class		IP 40
Attachment		Wall mounting (Standard), Desktop case respectively Installation housing on demand
Dimensions H x W x D		189 x 189 x 58 mm
Weight incl. bracket		1,1 kg

